

RFA Flameproof Rod-Type Immersion Heaters

The RFA range of flameproof rod-type immersion heaters is suitable for installation in process tanks, safety showers, engine sumps, pressure vessels and similar plants located in Zone 1 and Zone 2 hazardous areas, where the flammable atmosphere is a IIA, IIB or IIC Gas Group. They are suitable for heating all process liquids or gases which are non-corrosive to the materials of construction.





FEATURES

- Certified to meet the ATEX Equipment Directive
- Lightweight cast aluminium alloy terminal enclosure with weatherproof protection to IP66 and IP67
- Choice of built in process temperature sensors
- Suitable for ambient temperatures -40°C to $+40^{\circ}\text{C}$
- Mounting of the heater can be by a threaded boss or an industry standard flange
- Designed for horizontal installation (vertical mounting available on request)

TYPICAL APPLICATIONS

- Pre-heating oil / water
- Processing equipment
- Cleaning and rinsing tanks
- Heat transfer systems
- Boiler equipment
- Frost protection
- Safety showers
- Water / glycol packages
- Refrigeration packages
- Oil separators

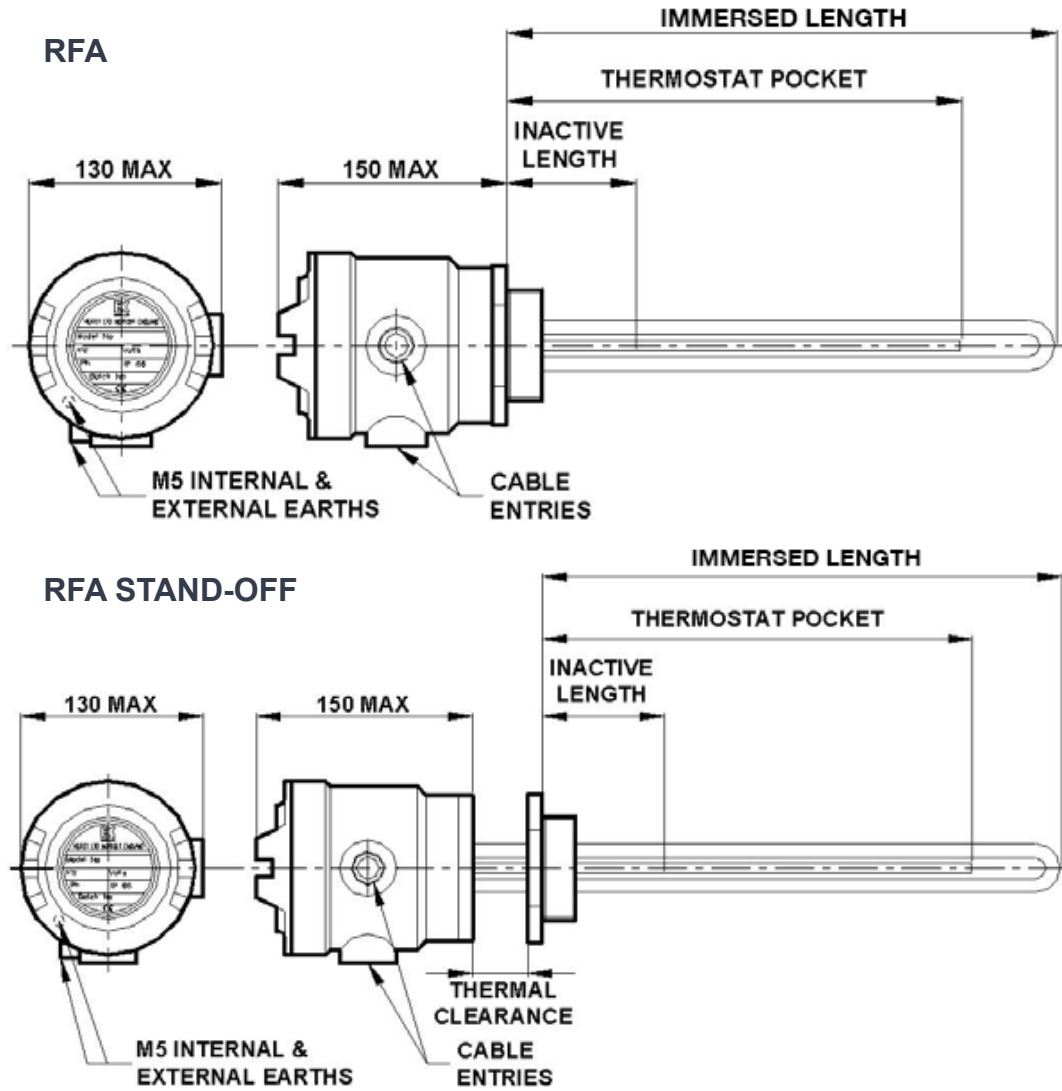

Certification	ATEX  II 2 G Ex d IIC T3 to T6 Gb Zone 1 and 2 CU TR (formerly GOST)
Enclosure	Cast aluminium alloy with a maximum of one M20 and one M25 cable entry, external and internal earths and screwed terminal cover; certified Ex d IIC T4 to T6 with the option of T3 to T6, where the terminal enclosure is stood away from the processing equipment
Elements	A maximum of three rod-type elements, comprising 80/20 nickel chrome resistance wire, compacted in high purity magnesium oxide insulating powder and encased in either Incoloy 800, 825 or 316L, 304 or 321 stainless steel, secured by either brazing or welding, depending upon the process application
Controls	Heater over temperature protection is fitted as standard
Mounting	Any threaded NPT or BSP boss or flange in any material can be specified within the limits of the design parameters; heaters can be either 'direct-on' or 'standoff' as required by the certification
Rating	12kW (water applications) and up to 3kW (light-medium oil applications)
Voltage	Any electrical supply up to 690V